

is assigned for its data signal to be emitted an assigned transmission channel with a transmission band used only once; and

at least one network node having an add-drop arrangement as claimed in claim 1.

5

7. (Amended) The optical ring network as claimed in claim 6, further comprising a further fiber provided for protection purposes.

### REMARKS

The present Amendment revises the specification and claims to conform to United States patent practice, before examination of the present PCT application in the United States National Examination Phase. Pursuant to 37 CFR 1.125 (b), applicants have concurrently submitted a substitute specification, excluding the claims, and provided a marked-up copy. All of the changes are editorial and applicant believes no new matter is added thereby. The amendment, addition, and/or cancellation of claims is not intended to be a surrender of any of the subject matter of those claims.

Early examination on the merits is respectfully requested.

Submitted by,

Mark Bergner (Reg. No. 45,877)  
Mark Bergner  
Schiff Hardin & Waite  
Patent Department  
6600 Sears Tower  
233 South Wacker Drive  
Chicago, Illinois 60606-6473  
(312) 258-5779  
Attorneys for Applicant

**CUSTOMER NUMBER 26574**

## Appendix A Mark Ups for Claim Amendments

This redlined draft, generated by CompareRite (TM) - The Instant Redliner, shows the differences between -  
original document : Q:\DOCUMENTS\YEAR 2001\PO10137-MARTIN-OPTICAL RING NETWORK\ORIGINAL CLAIMS.DOC  
and revised document: Q:\DOCUMENTS\YEAR 2001\PO10137-MARTIN-OPTICAL RING NETWORK\AMENDED CLAIMS.DOC

CompareRite found 76 change(s) in the text

Deletions appear as Overstrike text surrounded by []  
Additions appear as Bold-Underline text

1. **(Amended)** An add-drop arrangement [(51, 54, 61)] for a unidirectional optical ring network for launching and outputting optical signals, ~~[having]~~ **comprising:**  
a grating filter[(62)], designed as a bandstop filter, for ~~[an]~~ **said** optical ring network for outputting optical signals[(B-N), characterized in that the];  
a first coupler [(51)-has] **having** one input, to which ~~[the]~~ incoming signals [(B-N)] are fed, and two outputs~~[-, in that the]~~ **which are a first output [is connected to] and a second output; and**  
a second optical coupler [(64), which is] **that is connected to said first output, said second optical coupler being** designed as a grating filter [(62)] with bandstop properties, the grating filter [(62)] being tuned to ~~[the]~~ **a** wavelength of a signal [(A,ADD)] to be launched, such that ~~[this]~~ **said** signal is reflected **as a reflected signal**, and incoming signals [(B-N)] having all other wavelengths are passed at, and output at, an output[(3), in that the], **said second optical coupler [(61)-has] having** an add input [(8)] into which ~~[the]~~ **said** signal [(A,ADD)] to be launched is fed against its transmission direction, reflected, and added to ~~[the]~~ **said** passed signals[(B-N), and in that a];  
**said second output of [the] said first coupler [(51)-is] being** connected to a further optical filter [(52, 54)] via which an incoming optical signal [(DROP; B, DROP)] is output.

2. **(Amended)** The add-drop arrangement as claimed in claim 1, ~~[characterized in that the]~~ **wherein said** further optical filter [(52, 54)] of ~~[the]~~ **said** add-drop arrangement [(51, 54, 61)] is ~~designed in such a way that~~ **is configured to output** different transmission channels[(DROP; B, DROP)-are output.].

~~[3-]~~3. **(Amended)** The add-drop arrangement as claimed in claim 2, ~~[characterized in that]~~ **further comprising:**

~~[the add-drop arrangement (51, 54, 61)-has further]~~ **further** filters [(52)] which can be exchanged or switched over~~[,]~~; and

~~[has]~~ exchangeable second **optical** couplers ~~[(64)]~~ with grating filters ~~[(62)]~~ tuned to other wavelengths.

4. **(Amended)** The optical ring network as claimed in claim 3, ~~[characterized in that the]~~  
5 **wherein said** add-drop arrangement ~~[(51, 54, 61)]~~ has exchangeable second **optical** couplers ~~[(64)]~~  
which are tuned to other wavelengths.

5. **(Amended)** The optical ring network as claimed in claim 2, ~~[characterized in that the]~~  
**wherein said** second **optical** coupler ~~[(64)]~~ has a further connection via which ~~[the]~~ **said** reflected  
10 signals are led to an optical sink~~[(63)]~~.

6. **(Amended)** An optical unidirectional ring network ~~[having]~~, **comprising:**  
a plurality of network nodes~~[(NA--NN)]~~, in which data signals ~~[(A, B, ...N)]~~ are transmitted in  
wavelength-division multiplex operation via an optical fiber ~~[(1)]~~ and every network node ~~[(NA--NN)]~~ is  
15 assigned for its data signal ~~[(A, ADD)]~~ to be emitted an assigned transmission channel ~~[(A)]~~ with a  
transmission band used only once~~[, characterized in that]; and~~  
at least one network node ~~[(NA--NN) has]~~ **having** an add-drop arrangement ~~[(51, 54, 61)]~~ as  
claimed in ~~[one of the preceding claims.]~~ **claim 1.**

~~[7.]~~7. **(Amended)** The optical ring network as claimed in claim 6, ~~[characterized in that]~~  
20 **further comprising** a further fiber ~~[(P1) is]~~ provided for protection purposes.

This redlined draft, generated by CompareRite (TM) - The Instant Redliner, shows the differences between -

original document : Q:\DOCUMENTS\YEAR 2001\P010137-MARTIN-OPTICAL RING NETWORK\ORIGINAL SPECIFICATION.DOC

5 and revised document: Q:\DOCUMENTS\YEAR 2001\P010137-MARTIN-OPTICAL RING NETWORK\SUBSTITUTE SPECIFICATION.DOC

CompareRite found 71 change(s) in the text

10 Deletions appear as Overstrike text surrounded by []  
Additions appear as Bold-Underline text

[Description] **SPECIFICATION**

[Optical-unidirectional-ring-network] **TITLE**

15 **OPTICAL UNIDIRECTIONAL RING NETWORK**

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

[0001] The invention relates to an optical unidirectional ring network  
[according to the preamble of patent claim 1.] **for launching and outputting optical**  
20 **signals.**

[Known] **Description of the Related Art**

[0002] **Ring networks are known** for the purpose of transmitting large data volumes [are ring networks] in which data are transmitted between different network nodes/terminals in a unidirectional or - mostly via two fibers - bidirectional fashion.

25 [Known][0003] **A colored section ring is known** from the "22nd European Conference on Optical Communication" - ECOC 96, Oslo, pages 3.51 to 3.54 [is a colored section ring] in which a wavelength used only once is used in each case for transmission between two network nodes. As a result, it is possible in the event of interference to switch a standby connection with the same wavelength via the  
30 undisturbed part of the ring network.

[The plurality of][0004] **Numerous** variants for add-drop modules with couplers and filters are specified in IEEE Photonics Technology Letters 6(1994), No. 6, New

York, pages 760 to 763, "Optically-Amplified WDM Ring Network Incorporating Channel-Dropping Filters". Conventional filters are used for outputting and launching signals.

[0005] Add-drop modules which essentially have two couplers and a reflection filter are ~~[to be gathered from]~~ **disclosed in** Electronics Letters 16 March 1995, Vol. 31, No. 6 pages 476 and 477. These add-drop modules are suitable only for specific networks, since signals of identical wavelengths are launched and output.

[0006] In ~~[Figure 2 in]~~ "Optical Fiber Communication Conference" 1992, San Jose 2-7, Optical Society of America, US, Washington DC 2006, pages 255-256, **and Figure 2,** there is a description of an add-drop module having a plurality of conventional drop filters and add filters. A protection connection is set up in the usual way by feeding back the data.

~~[Disclosed]~~[0007] **A protection method is disclosed** in Electronics Letters, GB, IEE Stevenage, Vol. 32, no. 3,1, February 1996, pages 234-235, "Increased Capacity in an MS Protection Ring Using WDM Technique and OADM: The Coloured Section Ring" ~~[is a protection method]~~ in which different wavelengths are used for individual link sections of a bidirectional ring network. A protection connection is made via a wavelength not used on the undisturbed sections.

[0008] Wavelength changes are required as a rule in order to reconfigure a ring network, ~~[that is to say]~~ **i.e.,** to set up new logic connections. The aim with newly designed optical ring networks is for data to be dropped and inserted on the optical plane, and ~~[for reconfiguration to be a]~~ **to permit** simple ~~[possibility]~~ **reconfiguration.** Moreover, it is also possible to implement the ring network including the add-drop modules (network nodes) as cost effectively as possible.

#### **SUMMARY OF THE INVENTION**

[0009] **The invention provides [Such] an add-drop arrangement for a unidirectional optical ring network for launching and outputting optical signals, comprising a grating filter, designed as a bandstop filter, for said optical ring network for outputting optical signals; a first coupler having one input, to which incoming signals are fed, and two outputs which are a first output and a second output; and a second optical coupler that is connected to said first output, said second optical coupler being designed as a grating filter**

with bandstop properties, the grating filter being tuned to a wavelength of a signal to be launched, such that said signal is reflected as a reflected signal, and incoming signals having all other wavelengths are passed at, and output at, an output, said second optical coupler having an add input into which said signal to be launched is fed against its transmission direction, reflected, and added to said passed signals; said second output of said first coupler being connected to a further optical filter via which an incoming optical signal is output. The further optical filter ~~[module is specified in claim 1.~~

~~Advantageous developments] of the add-drop [module ring network are specified in the subclaims. A ring network implemented thereby is specified in claim 6.~~

~~]arrangement may be configured to output different transmission channels. The inventive add-drop arrangement may further comprise further filters which can be exchanged or switched over; and exchangeable second optical couplers with grating filters tuned to other wavelengths. The add-drop arrangement may have exchangeable second optical couplers which are tuned to other wavelengths, and/or the second optical couplers may have a further connection via which said reflected signals are led to an optical sink.~~

**[0010]** An inventive optical unidirectional ring network comprising a plurality of network nodes, in which data signals are transmitted in wavelength-division multiplex operation via an optical fiber and every network node is assigned for its data signal to be emitted an assigned transmission channel with a transmission band used only once, can utilize at least one network node having an above-described inventive add-drop arrangement. This network may further comprise a further fiber provided for protection purposes.

**[0011]** A unidirectional ring network is particularly cost effective, since only one glass fiber is required for transmission, and the network nodes can be of simple design. A unique assignment of transmission channels, and thus of the transmitted data signals to the network nodes is provided by the fixed assignment of a specific transmission channel or a wavelength, which is used only once in the ring network, to a network node. Since each network node receives the data signals of all other network nodes, the setting up of an arbitrary connection to other network nodes is possible by selecting an appropriate receiving filter. If a receiving filter which can be

switched over or tuned is selected, any desired connections can be set up between all the network nodes. A plurality of filters also permits simultaneous connection to a plurality of network nodes.

[0012] A very simple design of an add-drop module or a network node results from the use of a coupler which is provided with a grating and thereby has filtering properties. {

}If higher demands are placed on the transmission integrity, it is possible to provide for backup circuits a second ring in which the data transmission is performed in the opposite direction.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Exemplary embodiments of the invention are explained in more detail with the aid of figures[, in which:

},

[0014] Figure 1 ~~{shows an}~~ **is a schematic block diagram showing a** unidirectional ring network[,

};

[0015] Figure 2 ~~{shows a }~~ **is a schematic block diagram showing an** obvious exemplary embodiment of a network node[,

};

[0016] Figure 3 ~~{shows}~~ **is a schematic block diagram showing** an exemplary embodiment according to the invention of this network node[,]; and

[0017] Figure 4 ~~{shows}~~ **is a schematic block diagram showing** a unidirectional ring network having a standby transmission ring.

#### DETAILED DESCRIPTION OF THE INVENTION

[0018] A unidirectional ring network having a plurality of network nodes NA, NB, NC, ..., NN is illustrated in Figure 1. The transmission between arbitrary network nodes is performed using wavelength-division multiplex operation via a glass fiber 1 in a plurality of transmission channels  $\Lambda A$  to  $\Lambda N$ , which have a prescribed

wavelength spacing from one another. The transmission direction is marked by arrows.

**[0019]** The network node NA is illustrated as a block diagram in Figure 2 in ~~[an obvious]~~ **a standard** implementation. Network nodes serve the purpose of implementing different connections, which are always performed via transmission channels. Data signals ~~[to be]~~ **that are** output in the network node are denoted as drop signals (drop), **and** those ~~[to be]~~ **that are** emitted being denoted as add data signals (add). Dropping, switching through or adding channels are also ~~[spoken of]~~ **considered**, the signals transmitted in these channels being intended, in the narrower sense. Reference symbols with identical indices are used for the transmission channels and the associated data signals. A data signal  $\lambda A$  is transmitted in the associated transmission channel  $\Lambda[B] A$ .

**[0020]** The network node reduced to the essential functions of an add-drop module contains the series circuit of an amplifier 4, an output device 5 and a launching device 6. A wavelength-division multiplex signal of all the data signals  $\lambda A - \lambda N$  received via transmission channels  $\Lambda A - \Lambda N$  is present at the input 2. A single signal can be transmitted in each transmission channel (transmission band), or else a plurality of individual signals can be transmitted using wavelength-division ~~[multiplex operation or, of course, also using time division]~~ **(or time-division)** multiplex operation.

**[0021]** The received signals are ~~[firstly]~~ **initially** amplified and then passed to the output device 5. There, all the data signals/transmission channels are ~~[firstly]~~ **then** split up into two signal paths in a 1:2 coupler (branching device). All the transmission signals/transmission channels to be switched through, except for the transmission channel  $\Lambda A$  assigned to this network node, are switched through via a signal path; a transmission channel  $\Lambda DROP$  or ~~[the]~~ **its** data signal  $\lambda DROP$  ~~[thereof]~~, for example, the data signal  $\lambda B, DROP$ , is output via the other signal path.

**[0022]** The transmission channel  $\Lambda DROP$  to be dropped is selected by the output device, designed here as a wavelength filter. The wavelength filter is illustrated here schematically as a coupler 51 with a fixed bandpass filter 52, ~~[which]~~ **that** can be switched over or tuned, and a bandstop filter 53. The channel  $\lambda DROP$  is the only one in the passband of the bandpass filter 52. It is relayed to a user



terminal, for example, via a drop output 7.

**[0023]** Instead of the dropped data signal/channel, an appropriate data signal  $\lambda A, ADD$  present at the add input 8 in the assigned transmission channel is added in this network node in the launching device 6, designed as coupler. This presupposes that the signal  $\lambda A$  (loop return signal) already emitted from the network node A and received again via the ring at the input 2 must be blocked at the latest upstream of the launching device 6. ~~[Provided]~~ **The bandstop filter 53 is provided** for this purpose ~~[is the bandstop filter 53]~~, which is situated in the first signal path and permanently tuned to the corresponding wavelength. The transmission of this signal can certainly also already be interrupted in the preceding network node MN, but this entails an additional outlay on configuration given additional further network nodes.

**[0024]** A wavelength-division multiplex signal containing the signals of all the transmission channels  $\lambda A, ADD$  and  $\lambda B$  to  $\lambda N$  is emitted at the output 3.

**[0025]** Each network node can receive the corresponding transmitted signal of each other network node, that is to say, an appropriate connection can be set up in each case by exchanging, switching over or tuning the band pass filter 52. ~~[It is thereby]~~ **This makes it** possible to change the configuration in a simple way.

**[0026]** A network node according to the invention is illustrated in Figure 3. In this exemplary embodiment, a tunable bandpass filter 54 **is** provided, and a coupler 61 provided with a grating 62 serves as launching device 61, 62. The wavelength-division multiplex signal coming from the amplifier 4 also contains the data signal  $\lambda A$ , which has already transversed the entire ring network (loop return signal). The latter is reflected by the grating 62, which acts as a bandstop filter, and destroyed in an optical sink 63 (a suitable optical fiber termination). The signal  $\lambda A, ADD$  initially fed into the coupler contrary to the direction of transmission of the ring network is likewise reflected by the grating and thereby sent onwards in the transmission direction. Various structures are known for the coupler 61 provided with the grating. Either the grating is arranged in the coupling region (Figure 3), or two coupling regions are implemented between which separate gratings are respectively provided for each fiber.

**[0027]** Of course, it is also possible to implement connections to a plurality of channels between the individual network nodes. The add-drop modules illustrated in

Figures 2 and 3 can be connected in series or appropriately adapted for this purpose. The joint outputting and launching of a plurality of adjacent channels is also possible for the use of wider filters.

**[0028]** Figure 4 shows an expanded ring network in which the optical fiber 1 is supplemented by an optical fiber 1P provided for protection purposes. In the event of a breakage or some other disturbance affecting the optical fiber 1, the data signals - only the protection data signal  $\lambda$ AP being illustrated - are ~~{firstly}~~ **first** transmitted via the undisturbed portion of the ring network and then fed in the opposite direction into the protection optical fiber 1P[,] so that all the network nodes **KA, KB, KC, KN** receive the data signal. The selection of the transmission path is performed by changeover switches provided in the network ~~{nodes.Abstract}~~ **nodes**.

~~[Optical unidirectional]~~**[0029]** The above-described add-drop arrangement and optical ring network are illustrative of the principles of the present invention. Numerous modifications and adaptations will be readily apparent to those skilled in this art without departing from the spirit and scope of the present invention.

# ABSTRACT

**[0030]**      An optical ~~[Optical]~~ unidirectional ring network having a plurality of network nodes (NA, NB, ...), in which each network node is assigned a transmission channel ( $\Lambda A$ ) with a transmission band occurring only once. The network is

5      configured using receiving filters (54) which can be switched over or tuned.

~~[Figure 3]~~

APPROVED  
CAN 09/20/04

1/2

FIG 1

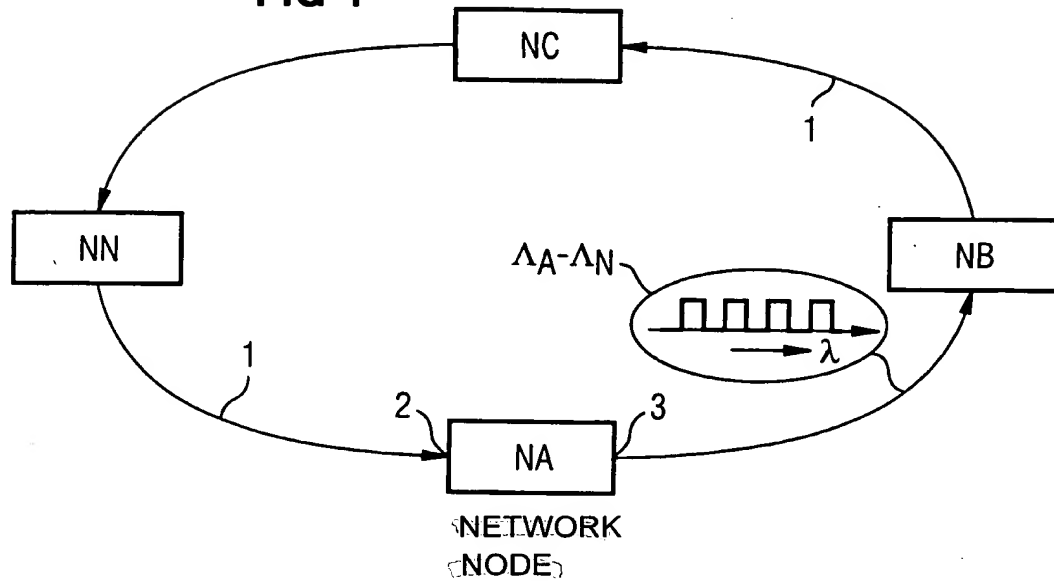


FIG 2

